


# TIMELESS ELEGANT, & TECHNICALLY PERFECT

The JDM ID models are **very adaptable in design and size**. The dispenser is height adjustable or fixed with cup/glass shelf. This way glasses, bottles or carafes of all sizes find their place.

- 4/5 drinks + cooled water ( Co2 or hot - optional )
- Bag-in-Box concentrate stored in the device, in base cabinet or directly behind the dispensing unit (bags up to 10 l possible)
- Height-adjustable dispense from 150 mm to 290 mm or FIX S 150 mm or FIX L 290 mm with height-adjustable cup/glass shelf (5 shelf positions)
- Multilingual LCD-Info display
- Drip tray with electronic notification ("FULL" and positions control) - OPTIONAL
- ESI ( Easy Slide in) labels
- Automatic cleaning and high hygiene through airtight concentrates
- Fully electronic control for dosage and quantity
- Simple handling - easy refilling, programming, service, and cleaning
- Perfect mixing result thanks to patented MidMix® technology
- External drink release (optional)
- Preparation for payment systems + accounting
- 2 different dispensing quantities per beverage directly selectable (button row left and right) - optional
- Durable and robust materials stainless steel or powder-coated steel
- Decor and front panels made of synthetic resin composite material extremely scratch-resistant and easily replaceable)-highly flexible adaptation to the desired design
- High model variety and multi-purpose installation options

Available in the following versions:

JDM ID 4/6	STILL	CO2	HOT & COLD
CT	✓	✓	✓
M	✓	✓	✓
L	✓	✓	✓
XL	✓	✓	✓

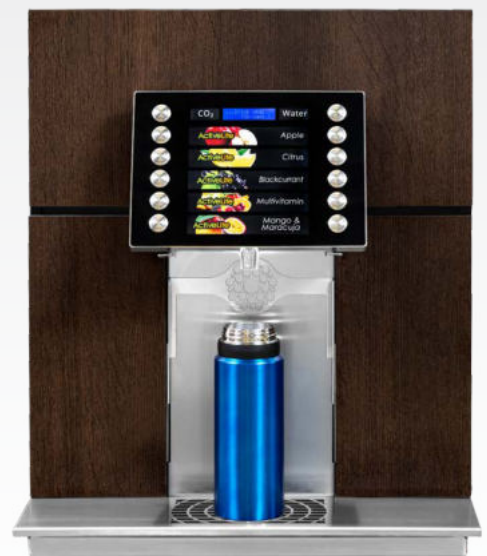

JDM ID L



Bags in device

Technikbox



edition FIX L



JDM ID M with design ZORRO

base cabinet with design ZORRO

Models JDM ID CT Dispenser	JDM ID CT 4-5 S STILL / CO <sub>2</sub> / HOT & COLD
Width	275 mm
Height	385-530 mm
Depth	215 mm
Exit height*	150-290 mm
Weight	9 kg
Pre-selections	OPTIONAL
Product selection )	max. 12
Aut. carafe pre-selection (Extra)	✓
Flavours	4 / 5
Mixing ratio for concentrates	1+4 ... 1+49
Quantity of selected drink	fix 150-500 ml / PULS
Dosage of preselection extra/jug	in Planung
<b>Technics box:</b>	28 l/h
Width	260 mm
Height	360 mm
Depth	460 mm
Weight	max. 23 / 27 / 25 kg
<b>Maximum concentrate tube length</b>	max. 5 m
Cooling capacity	
Dispensing temperature	5°C - ambient / max 75°C
Water pressure in bar	min 1,5 bar/max 6 bar
Voltage	230 V/ 50 Hz
Power max	250 / 250 / 2.600 W
CO <sub>2</sub> -carbonator	- / ✓
FSS <sup>1</sup>	✓
Flowmeter (Water)	✓
Dispensing area LED light	✓
Coin validator/cashless	OPTIONAL
External drink release	OPTIONAL
Accounting	✓
Payment systems MDB	OPTIONAL
Syrup injection valve (SIV <sup>2</sup> )	✓
Concentrate-empty message	OPTIONAL
Water gallon + pumpset	OPTIONAL
Control of Disinfection and sanitation intervals	✓

Models JDM ID Dispenser	JDM ID 4-5 M STILL / CO <sub>2</sub> / HOT & COLD	JDM ID 4-5 L STILL / CO <sub>2</sub> / HOT & COLD	JDM ID 4-5 XL STILL / CO <sub>2</sub> / HOT & COLD
Width	540 mm	540 mm	540 mm
Height	430-540 mm	640 mm	890 mm
Depth	500 mm	500 mm	500 mm
Exit height*	150-290 mm	150-290 mm	150-290 mm
Weight	50 / 54/ 52 kg	52 / 56 / 54 kg	54 / 58 / 56 kg
Pre-selections	OPTIONAL	OPTIONAL	OPTIONAL
Product selection	max. 12	max. 12	max. 12
Aut. carafe pre-selection (Extra)	✓	✓	✓
Flavours	4 / 5	4 / 5	4 / 5
Mixing ratio for concentrates	1+4 ... 1+49	1+4 ... 1+49	1+4 ... 1+49
Bag-space dimensions W x D x H	-	500 x 340 x 200 mm	500 x 340 x 450 mm
Quantity of selected drink	fix 150-500 ml / PULS	fix 150-500 ml / PULS	fix 150-500 ml / PULS
Cooling capacity	28 l/h	28 l/h	28 l/h
Dispensing temperature	5°C - ambient / 75°C	5°C - ambient / 75°C	5°C - ambient / 75°C
Water pressure in bar	min 1,5 - max 6	min 1,5 - max 6	min 1,5 - max 6
Voltage	230 V/ 50 Hz	230 V/ 50 Hz	230 V/ 50 Hz
Power max	250 / 250 / 2.600 W	250 / 250 / 2.600 W	250 / 250 / 2.600 W
CO <sub>2</sub> -carbonator	- / ✓	- / ✓	- / ✓
FSS <sup>1</sup>	✓	✓	✓
Flowmeter (Water)	✓	✓	✓
Dispensing area LED light	✓	✓	✓
Coin validator/cashless	OPTIONAL	OPTIONAL	OPTIONAL
External drink release	OPTIONAL	OPTIONAL	OPTIONAL
Accounting	✓	✓	✓
Payment systems MDB	OPTIONAL	OPTIONAL	OPTIONAL
Control sanitation/ cleaning intervals	✓	✓	✓
Syrup injection valve (SIV 2)	✓	✓	✓
Concentrate-empty message	OPTIONAL	OPTIONAL	OPTIONAL
Water gallon + pumpset	OPTIONAL	OPTIONAL	OPTIONAL

All our models are equipped with the unique and patented mixing system MidMix III.

- 1) FSS - flood security system: avoids water flood problems due to an extra safety valve on water entrance
- 2) SIV - syrup injection valve for a perfect mixing results

Exit height with edition FIX S: 150 mm

Exit height with edition FIX L : bis zu 290 mm with adjustable cup/glass shelf

SIZE INCL : PACKAGING	JDM ID CT 4-5 STILL / CO <sub>2</sub> / HOT & COLD	JDM ID 4-5 M STILL / CO <sub>2</sub> / HOT & COLD	JDM ID 4-5 L STILL / CO <sub>2</sub> / HOT & COLD	JDM ID 4-5 XL STILL / CO <sub>2</sub> / HOT & COLD
Width	570 mm	600 mm	600 mm	600 mm
Height	590 mm	500 mm	680 mm	920 mm
Depth	310 mm	540 mm	540 mm	540 mm
Weight incl. Packaging	35 / 39 / 37 kg	53 / 57 / 55 kg	55 / 59 / 57 kg	57 / 61 / 59 kg
<b>MACHINE /Pallet</b>				
Europallet 80 x 120 cm	8	4	4	2

ASCO Drink Machines GmbH  
Steyrer Straße 80, A - 4470 Enns,  
office@asco.at - www.asco.at - +43 / (0)7223 / 86197-0

